

Retractable Skel

Wharf container transportation is hard work! Trying to meet tight timeslot deadlines, changing schedules and then patiently waiting to be loaded, with all this going on, the last thing you need to worry about is whether your trailer can handle the demands! The Panus Retractable Skel provides total versatility and convenience to your fleet through its ability to carry various sized containers utilising its three reliable position points.


Whether fully extended to carry 1 x 40ft or 2 x 20ft containers, retracted to dock load or semi-extended to carry your heavy container, the Panus Retractable Skel will provide the total flexible container solution your business deserves.



Specification

Dimensions:	Length	12150 mm (L) 9,190mm (S)	Chassis Frame:	Main Rail Centres	1015 mm
	Width	2500 mm		Skid Plate	10 mm
	Skid Plate Height	1,270 mm		Kingpin	50 mm demountable (190kN)
	King Pin Position	1100 mm		Bumper Bar	Steel RHS
	Wheel Base	8650 mm		Side Infill Panels at Rear	
Suspension:	SAF Holland Module M38/2504E29 – Tri-Axle 286 RH – Air Bag (ADR Compliant)				
Axle:	Kedi Drum Brake Axle (ADR Compliant) 129mm Round, 10 Stud, 285 PCD, Greased, 6" Auto Slack Adjusters (ADR Compliant)				
Brake Kit:	Wabco EBS Brake Kit – TSE 24/30 Boosters		Wheels & Tyres:	Alloy 10 Stud 285 PCD / 11R 22.5	
Landing Gear:	Jost C200S with compensating feet (S-foot)		Twist Locks:	3-Way Twistlocks (1x20' / 2x20' / 1x40')	
Electrical:	Multi-Volt LED Lighting (ADR Compliant)		Paint:	Frame and Wheel Hubs 2 Pak	
Accessories:	Plastic Radius Guards with Mud Flaps at Rear Yellow coated twist-locks		Single Tyre Carrier Plastic Tool Box - STD 700 x 400 x 400		

Drawing

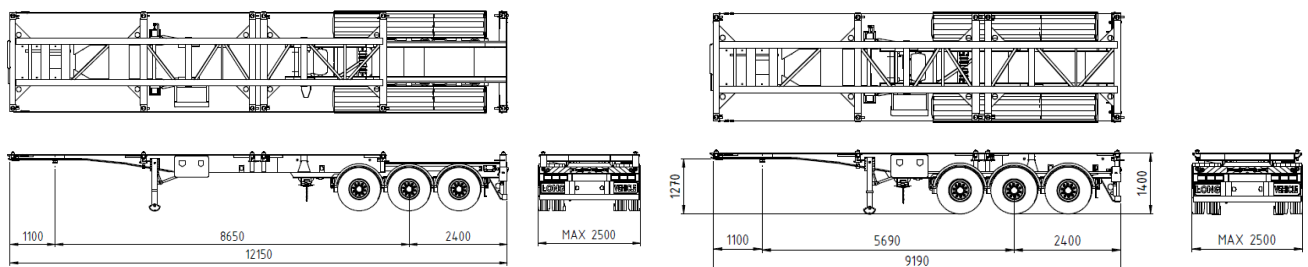

Images

